

CIRRUS®
Square Lay-in
medium texture




UP TO **86%** RECYCLED CONTENT

LEED®

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local* materials

EPD AVAILABLE

Calculate LEED contribution at armstrong.com/greengenie *LOCATION DEPENDENT

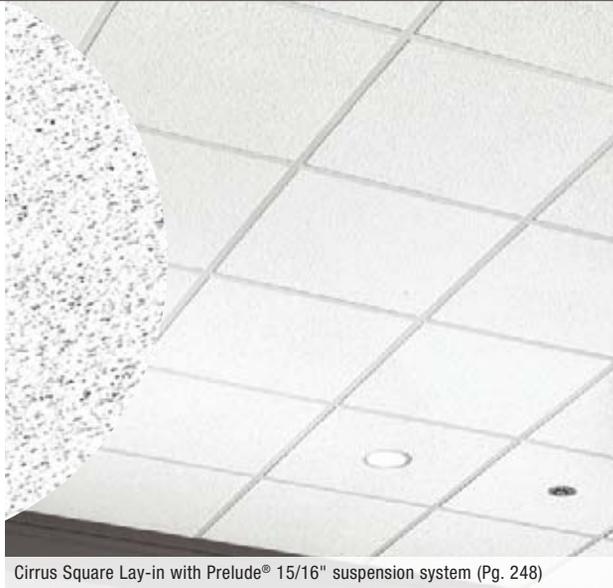

Cirrus Square Lay-in with Prelude® 15/16" suspension system (Pg. 248)

KEY SELECTION ATTRIBUTES

- Refined visual
- Excellent sound absorption
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options:
Items 574HRC and 533HRC.
71% Pre-consumer;
15% Post-consumer
- 94% Biobased content (see page 331)

TYPICAL APPLICATIONS

- Offices
- Healthcare – Assists in addressing HIPAA and FGI acoustical requirements
- Conference rooms
- Lobbies
- Public spaces/areas
- Department stores/retail



Visit Armstrong.com Photo Gallery to view more installation photos
SEARCH: cirrus

COLOR




VISUAL SELECTION

PERFORMANCE Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty†	
				NRC	CAC											
CIRRUS Square Lay-in																
15/16" Square Lay-in	1	574 574HRC	24 x 24 x 3/4"	□	0.70	35	Class A	0.86	•	•	•	Std	•	High	•	30
			24 x 24 x 3/4"	□	•	•	•	•	•	•	•	•	•	•	•	•
	1	533 533HRC	24 x 48 x 3/4"	□	0.70	35	Class A	0.86	•	Std	•	Std	•	High	•	10
1	NEW	FastSize™	W: 4" - 24" / L: 4" - 48" 3/4" Thick	□	0.70	35	Class A	0.86	•	Std	•	Std	•	High	•	10

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification
Type III, Form 1, Pattern E I
Fire Class A

Sag Resistance
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excludes items 533, 533HRC, and large sizes.

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPD's.

High Recycled Content*
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

30-Year Performance Guarantee & Warranty†
When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton
533 – 1.21 lbs/SF; 48 SF/ctn
574 – 1.10 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
574M, 533M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

