

“F” Fissured™

10

Year Availability
132

HRC

High Recycled Content



“F” Fissured Panels/
DONN Centricitee DXT Suspension System

Features and Benefits

- Cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Zero VOC emissions exceeds CA Specification 01350.
- USDA Certified Biobased Product[®]
- 12"x12" tile with the Donn[®] Brand DX[®]/DXL[™] concealed suspension system creates a “gridless” appearance.

Applications

- Administrative offices
- Schools
- Financial institutions
- Religious buildings

Substrate

- Cast mineral fiber

See LEED report tool at usgdesignstudio.com
for detailed sustainability information.



Medium - Textured Panel

To order samples, go to usg.com



Flat White
050

“F” Fissured™

To order samples/literature:
 Web: usg.com
 E-mail: samplit@usg.com
 Fax: 888 874.2348
 Technical Services:
 800 USG.4YOU (800 874.4968)

Websites:
usg.com
usgdesignstudio.com
 For the most up-to-date
 technical information:
usgdesignstudio.com

UL Classified												
Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Abuse-Resistant	Recycled Content ¹	Panel Cost
“F” Fissured™ Panels	SQ 	2'x2' x3/4" Paper-Back	Class A 131	.70 	35	.79	White	A, B, C	Zero		66% 	\$\$\$
		2'x4' x3/4" Paper-Back	Class A 135	.70 	35	.79	White	A, B	Zero		66% 	\$\$\$
	SL 	2'x2' x3/4" Paper-Back	Class A 132	.70 	35	.79	White	D	Zero		66% 	\$\$\$
		2'x4' x3/4" Paper-Back	Class A 136	.70 	35	.79	White	D	Zero		66% 	\$\$\$
	FL 	2'x2' x3/4" Paper-Back	Class A 133	.70 	35	.79	White	E, F, G, H	Zero		66% 	\$\$\$
“F” Fissured Tile ^{3,4}	BESK 	12"x12" x3/4"	Class A 102	.70 	25	.79	White	I	Zero		66% 	\$\$\$\$
	SESK 	12"x12" x3/4"	Class A 101	.70 	25	.79	White	J	Zero		66% 	\$\$\$\$

Legend

Zero Emissions (VOC)

Zero-emitting performance exceeds CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on the CHPS database. USG Certificate of Compliance for Zero VOC Emissions also available on usg.com.


High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

≥ .70 NRC

Grid Profile Options

A DX®/DXL™	B DXW™	C ⁵ Centricitee™ DXT™	D DX/DXL	E Centricitee DXT	F Fineline® DXF™	G Fineline 1/8 DXFF™	H Identitee™ DXI™	I DX/DXL Concealed	J DX/DXL Concealed

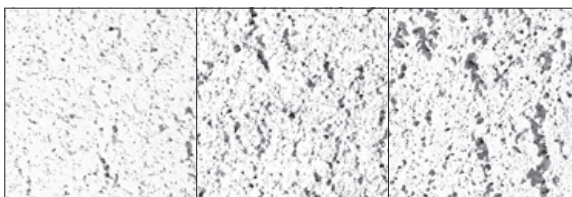

Composite of “F” Fissured ceiling products shows range to be expected in a production lot and possibly in the same panel or tile. Ranges are random and cannot be specified. Texture appearance will vary based on ceiling height, installation methods and natural variations of the product.

Physical Data/ Footnotes

Product literature

Data sheet: SC1816

ASTM E1264 classification

Type III, Form 4, Pattern D

ASTM E84 surface burning characteristics

Class A

Flame spread: 25

Smoke developed: 50

Weight

1.70 lbs./sq. ft.

Thermal resistance

R-1.7

Maximum backloading

See USG 30-Year Limited Warranty Commercial Applications SC2102.

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Texture

The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes

- For details, see LEED report tool at usgdesignstudio.com.
- LR values are shown as averages.
- Contact USG for adhesive recommendations for 12"x12" glue-up applications.
- Not UL Classified for acoustics.
- Maximum 2'x2' with SQ edge panels.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.



Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks Centricitee™, DONN® DX™, DXF™, DXFF™, DXI™, DXL™, DXT™, DXW™, “F” Fissured™, Fineline™, Identitee™, the USG LOGO® and related marks are trademarks of USG Corporation or its subsidiaries or affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

SC1816/rev. 12-13
 © 2013 USG Interiors, LLC
 Printed in U.S.A.