



Sandrift Panels with *ClimaPlus* Superior Performance/
Donn DX/DXL Suspension System

See LEED report tool at usgdesignstudio.com
for detailed sustainability information.

Features and Benefits

- Uniquely textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Optional Firecode® product designed to meet life-safety codes.
- *ClimaPlus* 30-year lifetime system warranty against visible sag, mold and mildew.
- USDA Certified Biobased Product⁵
- Zero VOC emissions exceeds CA Specification 01350.

Applications

- Conference and lobby areas
- Department stores
- Entertainment and gaming
- Executive offices
- Restaurants

Substrate

- Cast mineral fiber




Fine-Textured Panel

To order samples, go to usg.com

Standard Colors



Advantage Colors

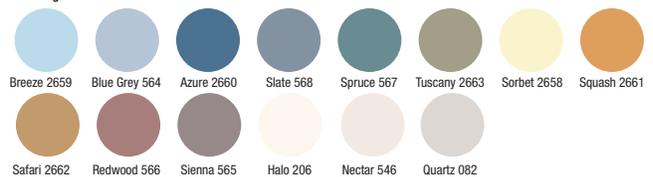

30

Year System Warranty
 - No visible sag
 - Mold/mildew protection

Sandrift™
ClimaPlus™
 Panels

Sandrift
 Non-*ClimaPlus*
 Panels

UL Classified													
Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR ²	Color ³	Grid Options	VOC Emissions	Anti-Mold & Mildew	Abuse Resistant	Recycled Content ¹	Panel Cost
SL 	2'x2' x3/4" Paper-Back	Class A	808	.70 	38 	.83	White Standard Advantage	A	Zero			69% 	\$\$\$
FL 	2'x2' x3/4" Paper-Back	Class A	809	.70 	38 	.83	White Standard Advantage	B, C, D, E	Zero			69% 	\$\$\$
SL 	2'x2' x3/4" Paper-Back		815	.55	35	.83	White	A	Zero			69% 	\$\$\$

Legend

Zero Emissions (VOC)

Zero-emitting performance exceeds CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on the CHPS database. USG Certificate of Compliance for Zero VOC Emissions also available on usg.com.

ClimaPlus Superior Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew.

High Recycled Content


Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

≥ .70 NRC/≥ 38 CAC

Firecode®

A	B	C	D	E
DX®/DXL™	Centricitee™ DXT™	Fineline® 1/8 DXFF™	Fineline DXF™	Identitee™ DXI™

Grid Profile
 Options



Physical Data/
 Footnotes

Product literature
 Data sheet: SC1841

ASTM E1264 classification
 Type III, Form 4, Pattern Z

ASTM E84 surface burning characteristics
 Class A

Flame spread: 25
 Smoke developed: 50

Weight
 1.60 lbs./sq. ft. (Class A)
 1.75 lbs./sq. ft. (Firecode weight)

Thermal resistance
 R-1.7 (Class A)
 R-1.3 (Firecode)

Maximum backloading
 See USG 30-Year Limited Warranty Commercial Applications SC2102.

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Texture
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes

1. For details, see LEED report tool at usgdesignstudio.com.
2. LR values are shown as averages.
3. To highlight the unique texture of Sandrift *ClimaPlus* panels, choose light colors. See Colors selector for more information.
4. For details, see Ceiling Systems Limited Warranty Commercial Applications (SC2102) and *ClimaPlus* Ceilings Certification of Performance (SC2451).
5. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

