


PERFORMA®

Baroque™



LOW VOC

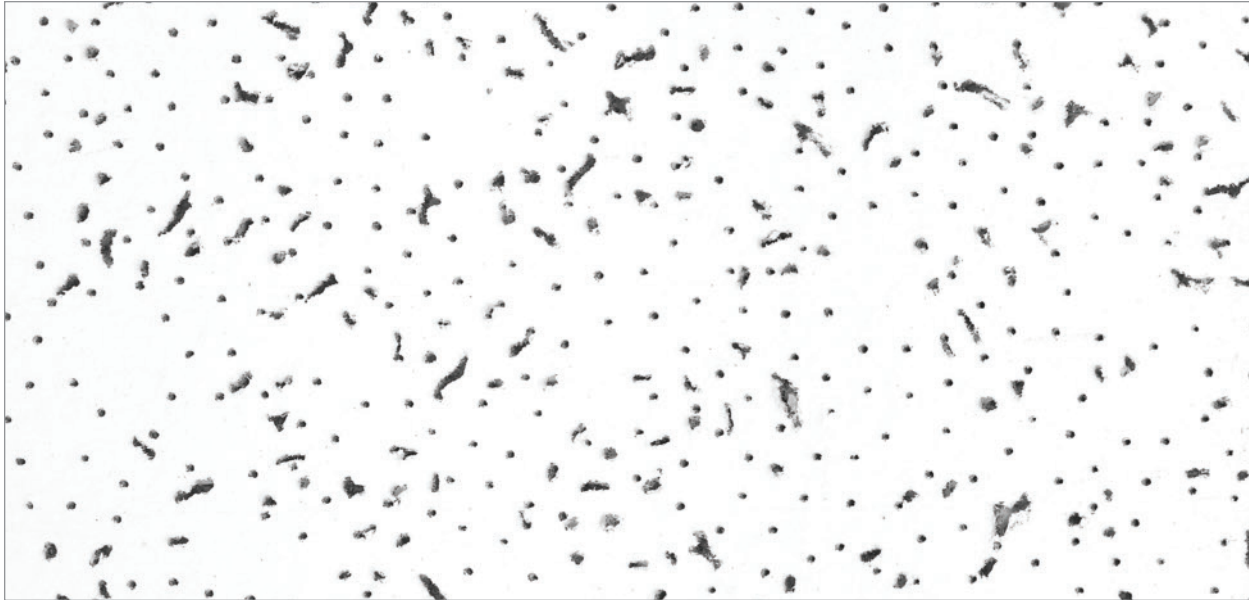

LEED®

- ✓ Optimize Energy Performance
- ✓ Construction Waste Management
- ✓ Recycled Content
- ✓ Regional Materials
- ✓ Sustainably Sourced Materials and Products
- ✓ IEQ: Low-Emitting

RECYCLED CONTENT

CLASS A

33% Pre-consumer | **0%** Post-consumer

PROTECTONE®

45% Pre-consumer | **0%** Post-consumer

RELATIVE INSTALLED COST: \$\$\$\$

FEATURES & BENEFITS

- 100% non-directional fissured pattern
- Variety of edge detail options and panel sizes
- No added formaldehyde
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Available in fire-rated (Protectone®) version

APPLICATIONS

- Utility Areas
- Discount Retail
- Strip Malls
- Commercial Interior Spaces

AVAILABLE EDGE DETAILS



Trim
15/16" Grid



Reveal
Corner Bevel
15/16" Grid



Narrow Reveal
Corner Bevel
9/16" Grid



Narrow Reveal
Corner Bevel
9/16" Grid Bolt
Slot



ATTRIBUTES

ITEM NUMBER	DIMENSIONS (INCHES)	EDGE DETAIL	UL CLASSIFIED		SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	SCRATCH RESISTANT	FIRE RATING	EMISSIONS	RECYCLED CONTENT
			NRC	CAC								
BET-157	24 x 24 x 5/8	Trim	0.60	33	—	—	0.83	—	—	Class A	Certified	33%
PBT-157	24 x 24 x 5/8	Trim	0.55	35	—	—	0.83	—	—	Protectone*	Certified	45%
BET-154	24 x 24 x 5/8	Reveal	0.60	33	—	—	0.83	—	—	Class A	Certified	33%
PBT-154	24 x 24 x 5/8	Reveal	0.55	35	—	—	0.83	—	—	Protectone*	Certified	45%
BET-150	24 x 24 x 5/8	Narrow Reveal	0.60	33	—	—	0.83	—	—	Class A	Certified	33%
BET-197	24 x 48 x 5/8	Trim	0.60	35	—	—	0.83	—	—	Class A	Certified	33%
PBT-197	24 x 48 x 5/8	Trim	0.55	40	—	—	0.83	—	—	Protectone*	Certified	45%
BET-194	24 x 48 x 5/8	Reveal	0.60	35	—	—	0.83	—	—	Class A	Certified	33%
BET-2067	20 x 60 x 5/8	Trim	0.60	35	—	—	0.83	—	—	Class A	Certified	33%

Protectone: A fire-resistive ceiling when used in applicable UL assemblies.

CAN'T FIND A SIZE? Contact your local Sales Representative 1-800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM E1264 CLASSIFICATION
Type III, Form 2, Pattern C D

FIRE PERFORMANCE
Per ASTM E1264: Class A, Flame Spread 25 or less
Per ASTM E84: Smoke Developed 50 or less

VOC EMISSIONS
Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
1 year Limited Warranty