


**ULTIMA®**  
**Square Lay-in**  
 fine texture



Items 1910, 1913



Ultima Square Lay-in with Prelude® 15/16" suspension system (Pg. 259)


**KEY SELECTION ATTRIBUTES**

- Smooth, clean, durable finish – Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- Scrubbable and water-repellent (Ultima Health Zone™)
- Excellent sound absorption
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 1910HRC, 1913HRC, 65% Pre-consumer; 15% Post-consumer
- 88% Biobased content (see page 331)
- Available with AirGuard™ Coating
- Visual coordinates with Optima® for mixed (open/closed plan) applications
- Items 1910 and 1935 available with Create!™ colors and images – see pages 165-167
- Non-directional visual reduces installation time and scrap
- Compatible with TechZone™ Ceiling Systems (Pgs. 235-241)
- Meets USDA/FSIS guidelines for use in food processing areas (items 1935 and 1938)
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

**TYPICAL APPLICATIONS**

- Offices
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Classrooms
- Corridors
- Lobbies/reception areas
- Department stores/retail
- Kitchens, dining rooms, and food preparation areas (items 1935, 1938)

**DETAIL** (Other Suspension Systems compatible. Refer to listing on page 224.)



1. Ultima Square Lay-in and Ultima Health Zone
2. Ultima Square Lay-in with Prelude 15/16" suspension system

**COLOR**



Create! colors available on items 1910, 1935. See pages 165-167.

# ULTIMA®

## Square Lay-in

fine texture

HRC items contain 15% or greater post-consumer recycled ceilings



UP TO **81%** RECYCLED CONTENT

**LEED®**

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local\* materials

EPD AVAILABLE

Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie) \*LOCATION DEPENDENT



### VISUAL SELECTION


### PERFORMANCE SELECTION

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability						Recycle Program	Warranty*								
				NRC	CAC						Water Repel	Wash	Scrub	Impact	Scratch	Soil			Primary (Embodied) Energy	Recycled Content+	No. of Years					
<b>ULTIMA Square Lay-in</b>				UL Classified		Humi-Guard+		Water Repel		Wash		Scrub		Impact		Scratch		Soil		Below 11MJ/SF		Yes		No. of Years		
15/16" Square Lay-in	1	<b>1420</b>	6 x 48 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
	1	<b>1425</b>	6 x 60 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
	1	<b>NEW 1990</b>	12 x 48 x 3/4"	0.65	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
	1	<b>NEW 1991</b>	12 x 60 x 3/4"	0.65	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
	1	<b>NEW 1992</b>	12 x 72 x 3/4"	0.65	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
	1	<b>1910</b> <b>1910HRC**</b>	24 x 24 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30
	1	<b>1913</b> <b>1913HRC**</b>	24 x 48 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30
	1	<b>1984</b>	24 x 60 x 3/4"	0.70	35	Class A	0.85	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30
	1	<b>1980</b>	24 x 72 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30
	1	<b>NEW FastSize™</b>	W: 12" - 30" / L: 18" - 72" 3/4" Thick	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30
<b>ULTIMA Health Zone™/High Washability</b>																										
15/16" Square Lay-in	1, 2	<b>1935</b>	24 x 24 x 3/4"	0.70	35	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
	1	<b>1938</b>	24 x 48 x 3/4"	0.70	35	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
<b>ULTIMA with AirGuard™ Coating</b>																										
15/16" Square Lay-in	1	<b>1900</b>	24 x 24 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	
	1	<b>1903</b>	24 x 48 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	30	

\*\* Other sizes not available for HRC items.

### SUSPENSION SYSTEMS



### PHYSICAL DATA

**Material**  
Wet-formed mineral fiber with DuraBrite® acoustically transparent membrane  
1935, 1938 – Wet-formed mineral fiber with DuraBrite acoustically transparent water-repellent membrane

**Surface Finish**  
DuraBrite with factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

**ASTM E1264 Classification**  
Type IV, Form 2, Pattern E  
Fire Class A

**Sag Resistance**  
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

**Anti Mold/Mildew & Bacteria**  
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

**VOC Emissions**  
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Primary (Embodied) Energy**  
See all LCA information on our EPD's.

**High Recycled Content+**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**  
R Factor – 2.2 (BTU units)  
R Factor – 0.39 (Watts units)

**30-Year Performance Guarantee & Warranty\***  
When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

**Cleaning Recommendations (Items 1935, 1938)**  
To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include:  
• Sodium hypochlorite • Hydrogen peroxide  
• Quaternary ammonium

**Weight; Square Feet/Carton**  
1910, 1913, 1938, 1900, 1903, 1935 – 1.08 lbs/SF; 48 SF/ctn  
1980 – 1.08 lbs/SF; 72 SF/ctn  
1984 – 1.08 lbs/SF; 80 SF/ctn  
1990 – 1.08 lbs/SF; 24 SF/ctn  
1991 – 1.08 lbs/SF; 30 SF/ctn  
1992 – 1.08 lbs/SF; 36 SF/ctn

**Minimum Order Quantity**  
1 carton

**Metric Items Available**  
1910M, 1913M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



TechLine<sup>SM</sup> / 1 877 ARMSTRONG  
[armstrong.com/commceilings](http://armstrong.com/commceilings)  
(search: ultima)  
BPCS-4595-413


LEED® is a registered trademark of the U.S. Green Building Council  
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2013 AWI Licensing Company  
Printed in the United States of America



MINERAL FIBER

# ULTIMA®


## Tegular fine texture



Items 1911, 1912,  
1914, 1915



Ultima Beveled Tegular with Sonata® 9/16" suspension system (Pg. 265)




### KEY SELECTION ATTRIBUTES

- Smooth, clean, durable finish – Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- Scrubbable and water-repellent (items 1936, 1937)
- Excellent sound absorption
- High CAC for excellent sound blocking – items 1951, 1952
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 1911HRC, 1912HRC, 1914HRC, 1915HRC. 65% Pre-consumer; 15% Post-consumer
- 88% Biobased content (see page 331)
- Available with AirGuard™ Coating
- Visual coordinates with Optima® for mixed (open/closed plan) applications
- Items 1912 and 1936 available on Create!™ colors and images – see pages 163-165
- Non-directional visual reduces installation time and scrap
- Compatible with the TechZone™ Ceiling Systems
- Meets USDA/FSIS guidelines for use in food processing areas (items 1936 and 1937)
- 30-Year Limited System Warranty against visible sag (excludes items 1905 and 1929), mold/mildew, and bacterial growth

### TYPICAL APPLICATIONS

- Offices
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Classrooms
- Corridors
- Lobbies/reception areas
- Department stores/retail
- Areas requiring frequent plenum access
- Areas with indirect lighting systems
- Kitchens, dining rooms, and food preparation areas (items 1936 and 1937)

### DETAIL (Other Suspension Systems compatible. Refer to listing on page 228.)

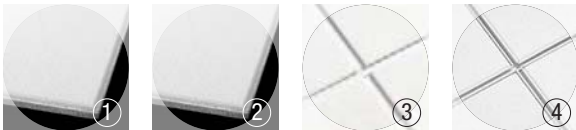

1. Ultima Beveled Tegular
2. Ultima Health Zone™ Beveled Tegular
3. Ultima with Suprafine® 9/16" suspension system
4. Ultima with Silhouette® XL® 9/16" suspension system with 1/4" reveal

### COLOR



White

Create! colors available on items 1912, 1936. See pages 165-167.

**ULTIMA®**

**Tegular**  
fine texture

HRC items contain 15%  
or greater post-consumer  
recycled ceilings



UP TO **81%** RECYCLED  
CONTENT

**EPD**  
AVAILABLE

**LEED®**



Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

\*LOCATION DEPENDENT



**VISUAL SELECTION**

**PERFORMANCE** Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability						Recycled Content*	Recycle Program	Warranty**	
				NRG	CAC						Water Repel	Wash	Scrub	Impact	Scratch	Soil				Primary (Embodied) Energy
<b>ULTIMA Tegular</b>				UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	UL Classified	
15/16" Beveled Tegular	15	<b>1422</b>	6 x 48 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>1917</b>	12 x 24 x 3/4"	N/A	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>NEW 1993</b>	12 x 48 x 3/4"	0.65	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>NEW 1994</b>	12 x 60 x 3/4"	0.65	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>NEW 1995</b>	12 x 72 x 3/4"	0.65	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>1911</b> <b>1911HRC**</b>	24 x 24 x 3/4" 24 x 24 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High High	•	30
	15	<b>1951</b>	24 x 24 x 3/4"	0.60	40	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>NEW 1894</b>	24 x 24 x 3/4"	0.60	40	Fire Guard	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>1914</b> <b>1914HRC**</b>	24 x 48 x 3/4" 24 x 48 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High High	•	30
	15	<b>1985</b>	24 x 60 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>1981</b>	24 x 72 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	15	<b>NEW FastSize™</b>	W: 12" - 30" / L: 18" - 72" 3/4" thick	0.60	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
<b>ULTIMA Tegular with AirGuard™ Coating</b>																				
15/16" Beveled Tegular	31-34, 54	<b>1901</b>	24 x 24 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30
	31-34, 54	<b>1904</b>	24 x 48 x 3/4"	0.70	35	Class A	0.90	•	•	•	•	•	•	•	•	•	•	High	•	30

\*\* Other sizes are not available for HRC items



**MINERAL FIBER**



# ULTIMA®

## Tegular fine texture

HRC items contain 15%  
or greater post-consumer  
recycled ceilings



UP TO **81%** RECYCLED  
CONTENT

**EPD**  
AVAILABLE

**LEED®**



Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

\*LOCATION DEPENDENT

### VISUAL SELECTION

### PERFORMANCE

 Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	Image	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability						Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty†
					NRC	CAIC						Water Repel	Wash	Scrub	Impact	Scratch	Soil				
<b>ULTIMA Tegular</b>					UL Classified	BioBlock+	Humi-Guard+	Water Repel	Wash	Scrub	Impact	Scratch	Soil	Below 11MJ/SF	High	Yes	No. of Years				
9/16" Beveled Tegular	29, 43, 47, 51, 55, 59	<b>1423</b>	6 x 48 x 3/4"		0.70	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>1427</b>	6 x 60 x 3/4"		0.70	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>1916</b>	12 x 24 x 3/4"		N/A	N/A	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>NEW 1996</b>	12 x 48 x 3/4"		0.65	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>NEW 1997</b>	12 x 60 x 3/4"		0.65	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>NEW 1998</b>	12 x 72 x 3/4"		0.65	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>1912</b> <b>1912HRC**</b>	24 x 24 x 3/4" 24 x 24 x 3/4"		0.70	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High High	•	30
	29, 43, 47, 51, 55, 59	<b>1952</b>	24 x 24 x 3/4"		0.60	40	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>NEW 1895</b>	24 x 24 x 3/4"		0.60	40	Fire Guard	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>1915</b> <b>1915HRC**</b>	24 x 48 x 3/4" 24 x 48 x 3/4"		0.70	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High High	•	30
	29, 43, 47, 51, 55, 59	<b>1986</b>	24 x 60 x 3/4"		0.70	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>1982</b>	24 x 72 x 3/4"		0.70	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30
	29, 43, 47, 51, 55, 59	<b>1905</b>	30 x 30 x 3/4"		0.70	35	Class A	0.90	•	Std	•	-	•	-	•	•	•	•	High	•	1
	29, 43, 47, 51, 55, 59	<b>1929</b>	30 x 54 x 3/4"		0.70	35	Class A	0.90	•	Std	•	-	•	-	•	•	•	•	High	•	1
	29, 43, 47, 51, 55, 59	<b>NEW FastSize™</b>	W: 12" - 30" / L: 18" - 72" 3/4" Thick		0.70	35	Class A	0.90	•	•	•	-	•	-	•	•	•	•	High	•	30

\*\* Other sizes not available for HRC items.

MINERAL FIBER

