


PERFORMA™

Baroque™ Customline®



LOW VOC

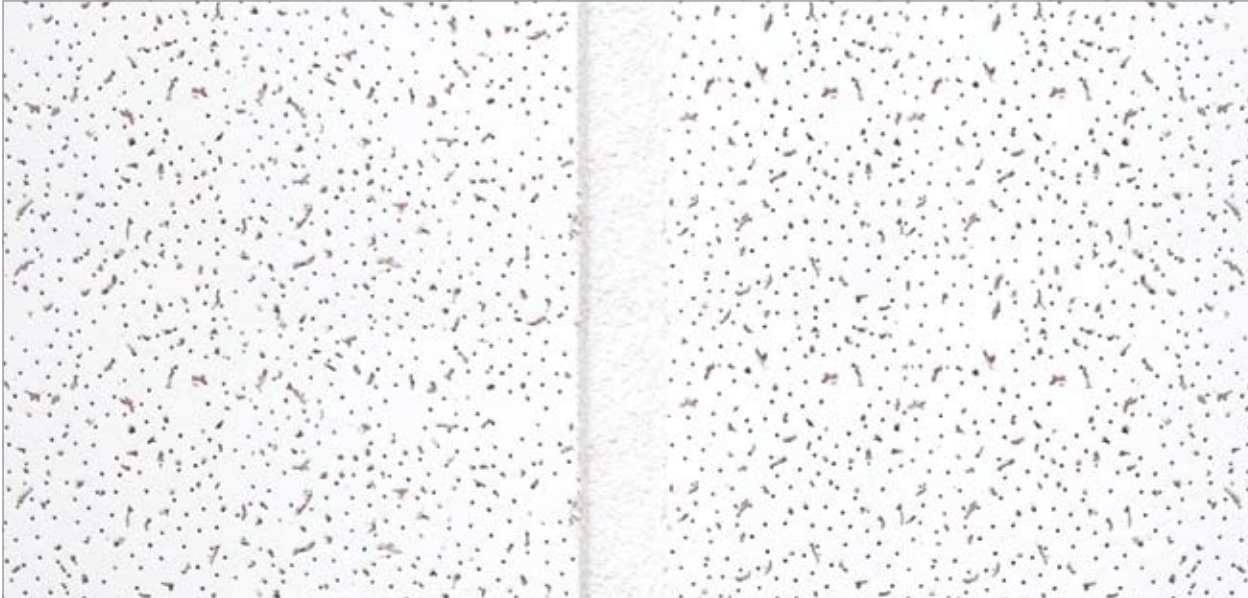

LEED®

- ✓ Optimize Energy Performance
- ✓ Construction Waste Management
- ✓ Recycled Content
- ✓ Regional Materials
- ✓ Sustainably Sourced Materials and Products
- ✓ IEQ: Low-Emitting

RECYCLED CONTENT

CLASS A

18% Pre-consumer	17% Post-consumer
----------------------------	-----------------------------

PROTECTONE®

37% Pre-consumer	8% Post-consumer
----------------------------	----------------------------

RELATIVE INSTALLED COST: \$\$\$\$


FEATURES & BENEFITS

- Three geometric designs with 100% non-directional fissured pattern
- Clean, three-dimensional scoring, free of fissures or pin perforations
- Product's deep scoring complements the suspension system, masking the metal grid
- No added formaldehyde
- Third-party verified Environmental Product Declaration (EPD) available for this product


APPLICATIONS

- Utility Areas
- Discount Retail
- Strip Malls
- Commercial Interior Spaces
- Offices

AVAILABLE EDGE DETAILS



SCORING OPTIONS





ATTRIBUTES

ITEM NUMBER	DIMENSIONS (INCHES)	EDGE DETAIL	UL CLASSIFIED		SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	SCRATCH RESISTANT	FIRE RATING	EMISSIONS	RECYCLED CONTENT
			NRC	CAC								
BQCL-224	24 x 48 x 3/4	Reveal	0.60	38	Yes	Optional	0.83	—	—	Class A	Certified	35%
PBQCL-224	24 x 48 x 3/4	Reveal	0.50	40	Yes	Optional	0.83	—	—	Protectone*	Certified	45%
BQCLN-224	24 x 48 x 3/4	Narrow Reveal	0.60	38	Yes	Optional	0.83	—	—	Class A	Certified	35%
BQCL-448	24 x 48 x 3/4	Reveal	0.50	38	Yes	Optional	0.83	—	—	Class A	Certified	35%
BQCLN-448	24 x 48 x 3/4	Narrow Reveal	0.50	38	Yes	Optional	0.83	—	—	Class A	Certified	35%
BQCL-812	24 x 48 x 3/4	Reveal	0.50	38	Yes	Optional	0.83	—	—	Class A	Certified	35%
BQCLN-812	24 x 48 x 3/4	Narrow Reveal	0.50	38	Yes	Optional	0.83	—	—	Class A	Certified	35%

Protectone: A fire-resistive ceiling when used in applicable UL assemblies.

PHYSICAL DATA

MATERIAL

Mineral Fiber

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C DK

FIRE PERFORMANCE

Per ASTM E1264: Class A, Flame Spread 25 or less
Per ASTM E84: Smoke Developed 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield™ treatment optional for added mold and mildew resistance.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

10 year 104/90 Limited Warranty

Technical Support | certainteed.com/ceilings 1-800-233-8990

CertainTeed
SAINT-GOBAIN
Ceilings