



GLACIER Panels/  
DONN FINELINE DXFF Suspension System

### Features and Benefits

- Heavily textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Zero VOC emissions exceeds CA Specification 01350.
- USDA Certified Biobased Product?
- Combine 12"x12" tile with the DONN® brand DX®/DXL™ concealed suspension system to create a monolithic ceiling surface.
- Integral color masks nicks and scratches and enhances lifelong panel appearance.
- Optional FIRECODE® product designed to meet life-safety codes.


### Applications

- Food courts
- Hospitality
- Libraries
- Restaurants

### Substrate

- Cast mineral fiber



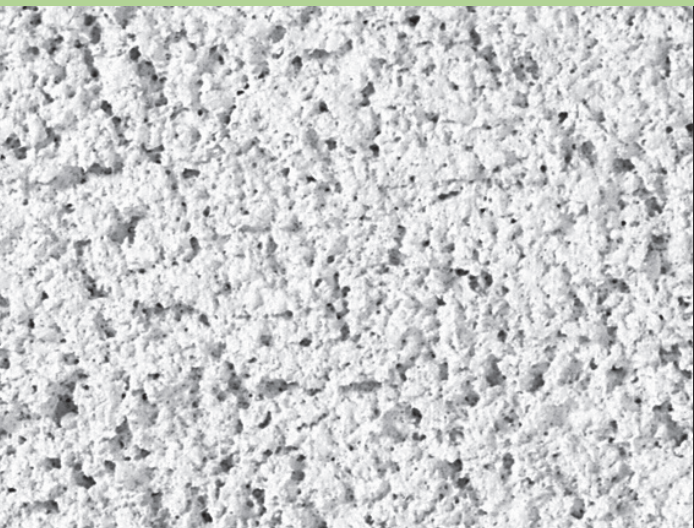








See LEED report tool at [usgdesignstudio.com](http://usgdesignstudio.com) for detailed sustainability information.

















Heavy-Textured Panel

### To order samples, go to [usg.com](http://usg.com)

**Standard Colors**

						
Flat White 050	Parchment 103	Manila 246	Beige 142	Straw 143	Sandstone 090	Taupe 107
						
Charcoal 534	Flat Black 205	Sivertone 052	Mist 053			

**Advantage Colors**

							
Breeze 2659	Blue Grey 564	Azure 2660	Slate 568	Spruce 567	Tuscany 2663	Sorbet 2658	Squash 2661
							
Safari 2662	Redwood 566	Sienna 565	Halo 206	Nectar 546	Quartz 082		

UL Classified												
Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color <sup>3</sup>	Grid Options	VOC Emissions	Abuse-Resistant	Recycled Content <sup>1</sup>	Panel Cost
GLACIER™ Panels	SL 	2'x2' x3/4" Paper-Back	Class A <b>707</b>	.65	35	.70	White Standard Advantage	A	Zero		69% 	\$\$\$
		2'x2' x3/4" Paper-Back	 <b>715</b>	.65	35	.70	White	A	Zero		70% 	\$\$\$
		2'x4' x3/4" Paper-Back	Class A <b>711</b>	.65	35	.70	White	A	Zero		69% 	\$\$\$
	FL 	2'x2' x3/4" Paper-Back	Class A <b>708</b>	.65	35	.70	White Standard Advantage	B, C, D, F	Zero		69% 	\$\$\$
GLACIER Tile <sup>4,5,6</sup>	SESK 	12"x12" x3/4"	Class A <b>701</b>	.65	25	.70	White	E	Zero		69% 	\$\$\$\$

**Legend**

**Zero Emissions (VOC)**

Zero-emitting performance exceeds CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on the CHPS database. USG Certificate of Compliance for Zero VOC Emissions also available on usg.com.

**High Recycled Content**

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**FIRECODE®**

Grid Profile Options	A DX®/DXL™ 	B CENTRICITEE™ DXT™ 	C FINELINE® DXF™ 	D FINELINE 1/8 DXFF™ 	E DX/DXL Concealed 	F IDENTITEE™ DXI™ 

**Physical Data/  
Footnotes**

**Product literature**  
Data sheet: SC1819

**ASTM E1264 classification**  
Type III, Form 4, Pattern F

**ASTM E84 surface burning characteristics**

Class A  
Flame spread: 25  
Smoke developed: 50

**Weight**  
1.45 lbs./sq. ft. (12"x12" tile)  
1.50 lbs./sq. ft. (Class A panels and tile)  
1.60 lbs./sq. ft. (FIRECODE® panel)

**Thermal resistance**  
R-1.7 (Class A)  
R-1.3 (FIRECODE)

**Maximum backloading**  
See USG 30-Year Limited Warranty Commercial Applications SC2102.

**Maintenance**  
Can be cleaned easily with a soft brush or vacuum.

**Texture**  
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

**Notes**  
1. For details, see LEED report tool at usgdesignstudio.com.  
2. LR values are shown as averages.  
3. See Colors selector for more information.  
4. Texture appearance will vary based on ceiling height, installation methods, and natural variation of the product.  
5. Contact USG for adhesive recommendation for 12"x12" glue-up applications.  
6. Not UL Classified for acoustics.  
7. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.